


## Display Screen Diagrams

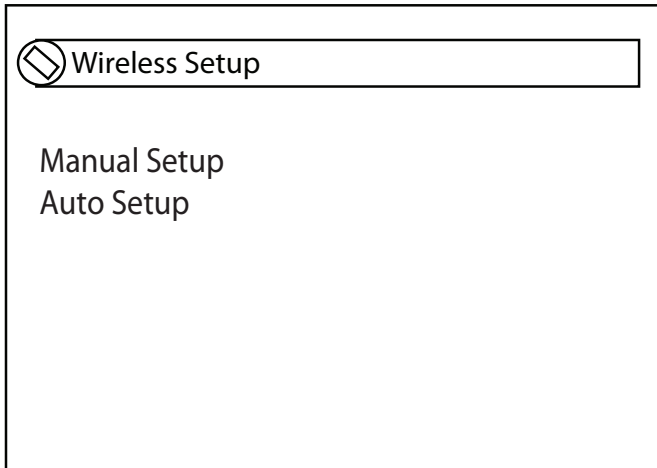

# UWF-1



Wireless USB LAN Adapter

## Getting Connected

Refer to the display screen diagrams at left and below for help implementing your UWF-1's wireless capacity. Further details are in your UWF-1's manual.

Connect the UWF-1 to the USB port on your network-capable Onkyo receiver; Press USB on the receiver's faceplate to select USB input.

## Manual Setup

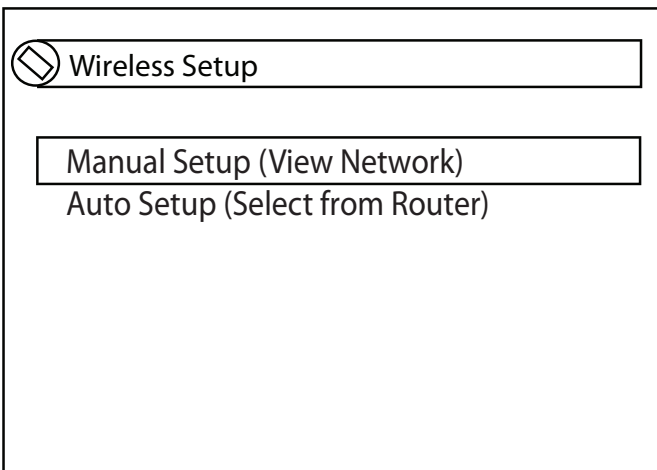


Use your receiver's remote control or front panel controls to navigate the display menu choices.

### Manual or Auto Setup?

Choose Manual Setup if your system requires a Security Code to connect, or choose Auto Setup if your router has Automatic Security Setup (WPS).

Choose "Manual Setup (View Network)"

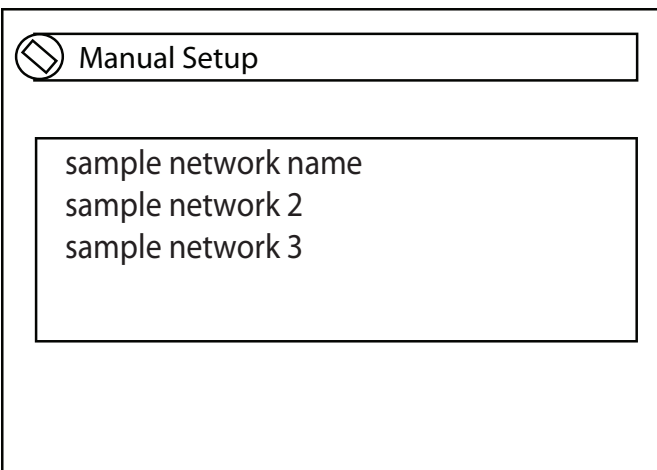

Choose your network



## WEP

Manual Setup

1  
2  
3  
4

Select Number  
(Most common setting is #1.)



Manual Setup

SSID : \*\*\*\*\*  
Security : WEP  
Key : \*\*\*\*\* (your password)  
Default Key ID: 1

OK

Default Key ID shows "1."  
Now select OK.



Manual Setup

Now Connecting

Connecting ...



Status

SSID: (your network name)  
Security: (WEP)  
Signal: (%)  
Status: Connected

Refresh  
Back

Connected.  
Note: If connection fails, please try a different Default Key ID.

## WPA

Manual Setup

Now Connecting

Connecting ...



Status

SSID: (your network name)  
Security: (WPA)  
Signal: (%)  
Status: Connected

Refresh  
Back


Connected.

# Auto Setup


Auto Setup works only with a router that has Automatic Security Setup (WPS).



Connect the UWF-1 to the USB port on your network-capable Onkyo receiver; Press USB on the receiver's faceplate to select USB input.



Use your receiver's remote control to navigate the display menu choices.

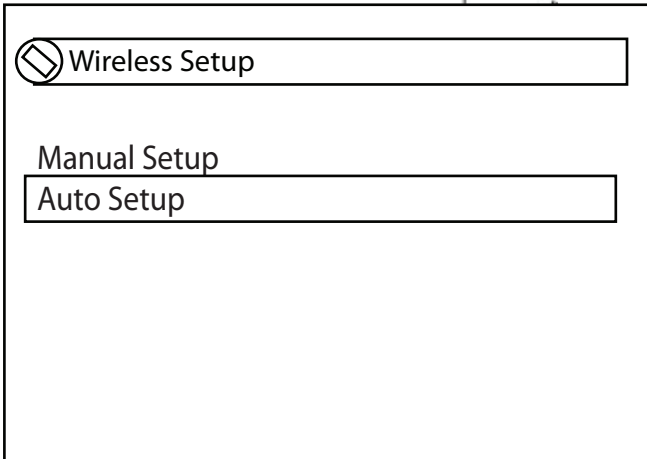


Select "Auto Setup"

## Press button or PIN code method

Your wireless LAN security settings will require one of these methods. Follow appropriate directions below, depending on which method your wireless LAN security settings require.


### Press Button

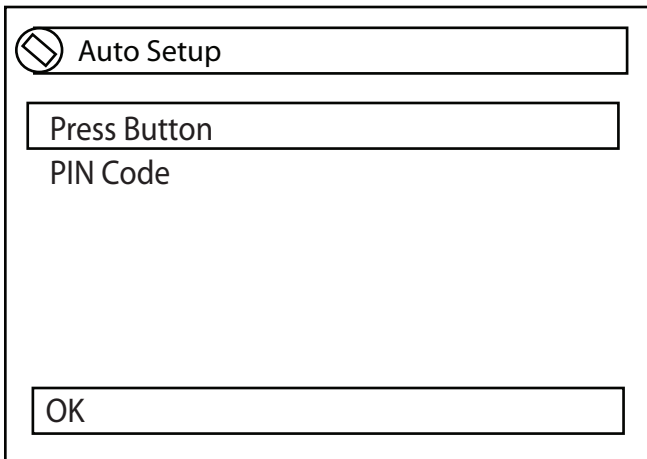

Select "Press button" and then press ENTER




### PIN Code

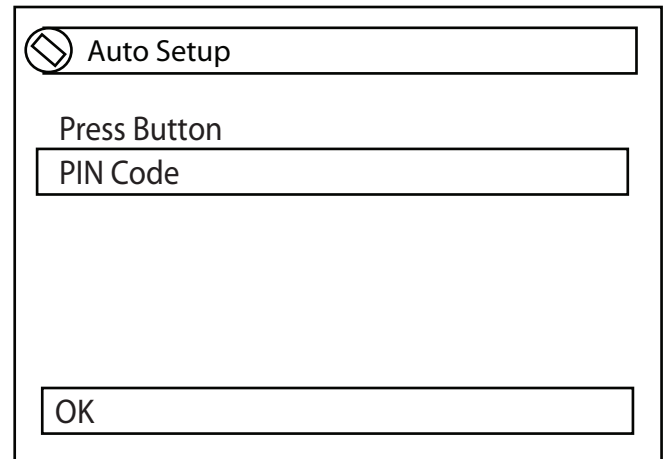

Select "PIN Code" and then press ENTER




## Press Button

 Auto Setup

Please select "OK" after pushing WPS button of the Access Point.

OK




 Auto Setup

Now Connecting

Connecting ...




 Status


SSID: (your network name)  
Security: ( )  
Signal: (%)  
Status: Connected

Refresh  
Back

Connected.



## PIN Code


 Auto Setup

PIN Code: #####  
Please select "OK" after inputting this PIN Code Access Point.

OK

For information on the registration process, please refer to the instruction manual provided with your Access Point device.




 Auto Setup

Now Connecting

Connecting ...



 Status

SSID: (your network name)  
Security: ( )  
Signal: (%)  
Status: Connected

Refresh  
Back

Connected.

