



NILES®



CM760

7" CEILING MOUNT LOUDSPEAKER



7" Two-Way Ceiling Mount Loudspeaker with Pivoting Tweeter

- 7" Interlaced Glass Fiber Woofer
- 1" Teteron® Dome Tweeter

SPECIFICATIONS SHEET

7 INCH CEILING MOUNT LOUDSPEAKER

7" Two-way Loudspeaker with Pivoting Tweeter

CM760

Stock Number

FG01299



Features

- Integrated woofer/baffle design delivers greater low frequency response by employing a 7" woofer where competitive models of the same outer size employ 6 1/2" woofers
- Interlaced glass fiber cone is lightweight yet extremely rigid for deep, powerful bass response
- Butyl rubber surround damps resonance and provides exceptional durability
- 1" fluid-cooled Teteron® dome tweeter offers ultra-wide dispersion and silky-smooth high-frequency response
- Proprietary bridge-mounted tweeter-adjustment mechanism focuses the high frequency sound in any direction up to 20° without diffraction
- 3 position tweeter level control provides for precise matching to room acoustics
- Includes flush-mount MicroPerf™ aluminum grille for a clean and unobtrusive look
- Weather resistant construction reduces installation limitations and provides unique solutions in moist environments or outdoors under eaves


Specifications

- Frequency Response: 54Hz to 21kHz +/-3dB
- Impedance: 8 ohm nominal; 6 ohm minimum
- Recommended Amplifier Power: 10 to 150 Watts
- Frame Dimensions: 9 1/4 inches (23.49 cm)
- Hole cutout dimensions: 8 inches (20.32 cm)
- Depth behind ceiling: 4 3/8 inches (11.11 cm)

Warranty: Lifetime Limited



PRODUCT CONSTRUCTION AND ACCESSORIES

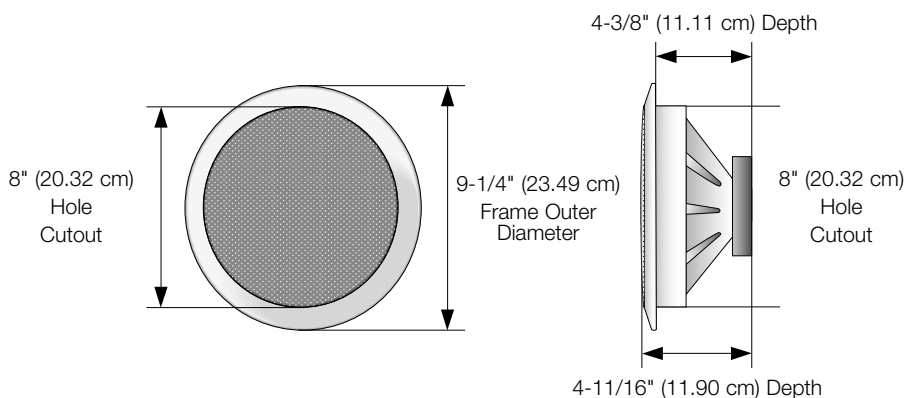

Loudspeaker Model		Works With			
Model	Stock Number	Previous Bracket	New Bracket	Metal Enclosure	Hole Cover
CM760	FG01299	 CM6 Series Bracket Kit FG00655	 CM700 BKT FG01308	 CE 6 FG00944	 CM700 Hole Cover FG01309